



Comparison of Efficiency


Note: 1. It may differ under some conditions.

2. Numbers in the charts below are relative values when the capacities of Makita Models are indexed at 100.

1 14.4V Model

Test conditions:


Drove 35mm drywall screws through a plasterboard into Douglas-fir timber.

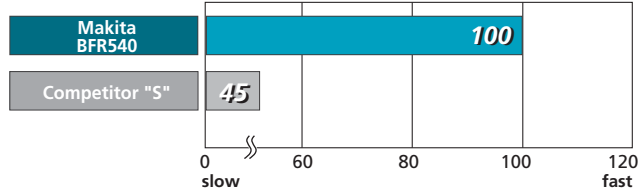

2 18V Model

Test conditions:

Drove 55mm drywall screws through three plasterboard into Douglas-fir timber.

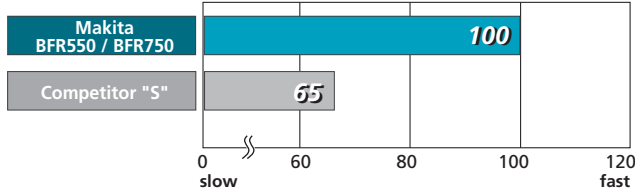

EXTREME STAMINA



Life time work volume
430%

in comparison with Makita Ni-cd 2.0Ah batteries

OPTIMUM CHARGING SYSTEM

Makes battery life longer because this charging system takes care of battery by following functions.

- :: Communicates with individual battery.
- :: Recognizes ID of battery and its history.
- :: Analyzes its condition ; Battery may have been abused by heat or over-discharging, or weakened by cycle age.
- :: Knows how to look after each MAKSTAR battery to MAXIMIZE CYCLE LIFE + WORK VOLUME.
- :: Charges optimum and gentle way with Active 3 Controls ;
Active Current Control
Active Thermal Control
Active Voltage Control

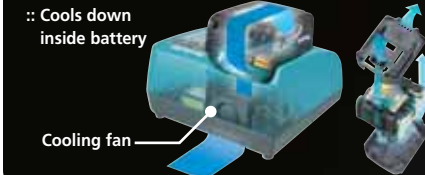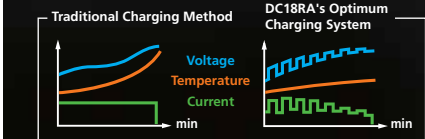

18V Lithium-ion Battery
BL1830


14.4V Lithium-ion
Battery BL1430




Charger : DC18RA

Charging time
22min.

Total Power Delivery Amount of each battery's service lifetime

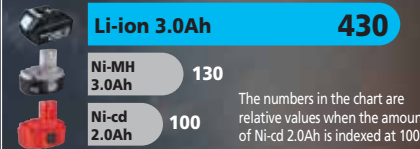

LIGHTWEIGHT & COMPACT

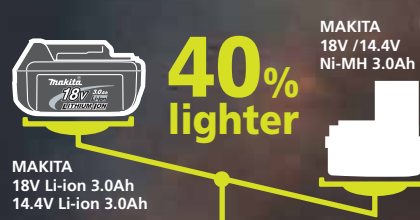

ANYTIME CHARGE

NO MEMORY EFFECT
No discharging required

SHOCK ABSORBING

HEAVY DUTY PACK

LONGTIME STORAGE

LOW SELF DISCHARGE

FIRM HOLDING

MULTI CONTACT

Accessories

Extension handle

Part No. 194500-1



Phillips bit 5pc per pkg.



For Model	Size	Length (mm)	Part No.
BFR540, BFR550	No.2	162	B-10481
BFR750	No.2	182	B-10475

Cordless Auto Feed Screwdriver



BFR540 / BFR550 / BFR750

	BFR540	BFR550	BFR750
Capacity Drywall screw	4 x 25 to 55mm (5/32"x 1 to 2-3/16")	4 x 25 to 55mm (5/32"x 1 to 2-3/16")	4 x 45 to 75mm (5/32"x 1-3/4 to 2-15/16")
Bit size Hex Shank	6.35mm (1/4")	6.35mm (1/4")	6.35mm (1/4")
No load speed (rpm)	4,000	4,000	4,000
Dimensions (L x W x H)	424 x 80 x 238mm (16-3/4" x 3-1/8" x 9-3/8")	424 x 80 x 238mm (16-3/4" x 3-1/8" x 9-3/8")	464 x 80 x 238mm (18-1/4" x 3-1/8" x 9-3/8")
Net weight	2.1kg (4.6lbs)	2.3kg (5.0lbs)	2.3kg (5.0lbs)
Voltage	14.4V	18V	18V

Standard Equipment
Bit (3pcs.)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z15216-2 2007-07



Satisfy Professional's Needs

Cordless Auto Feed Screwdriver


BFR540

14.4V 3.0Ah LITHIUM-ION

BFR550 / BFR750

18V 3.0Ah LITHIUM-ION

Quick Shot!

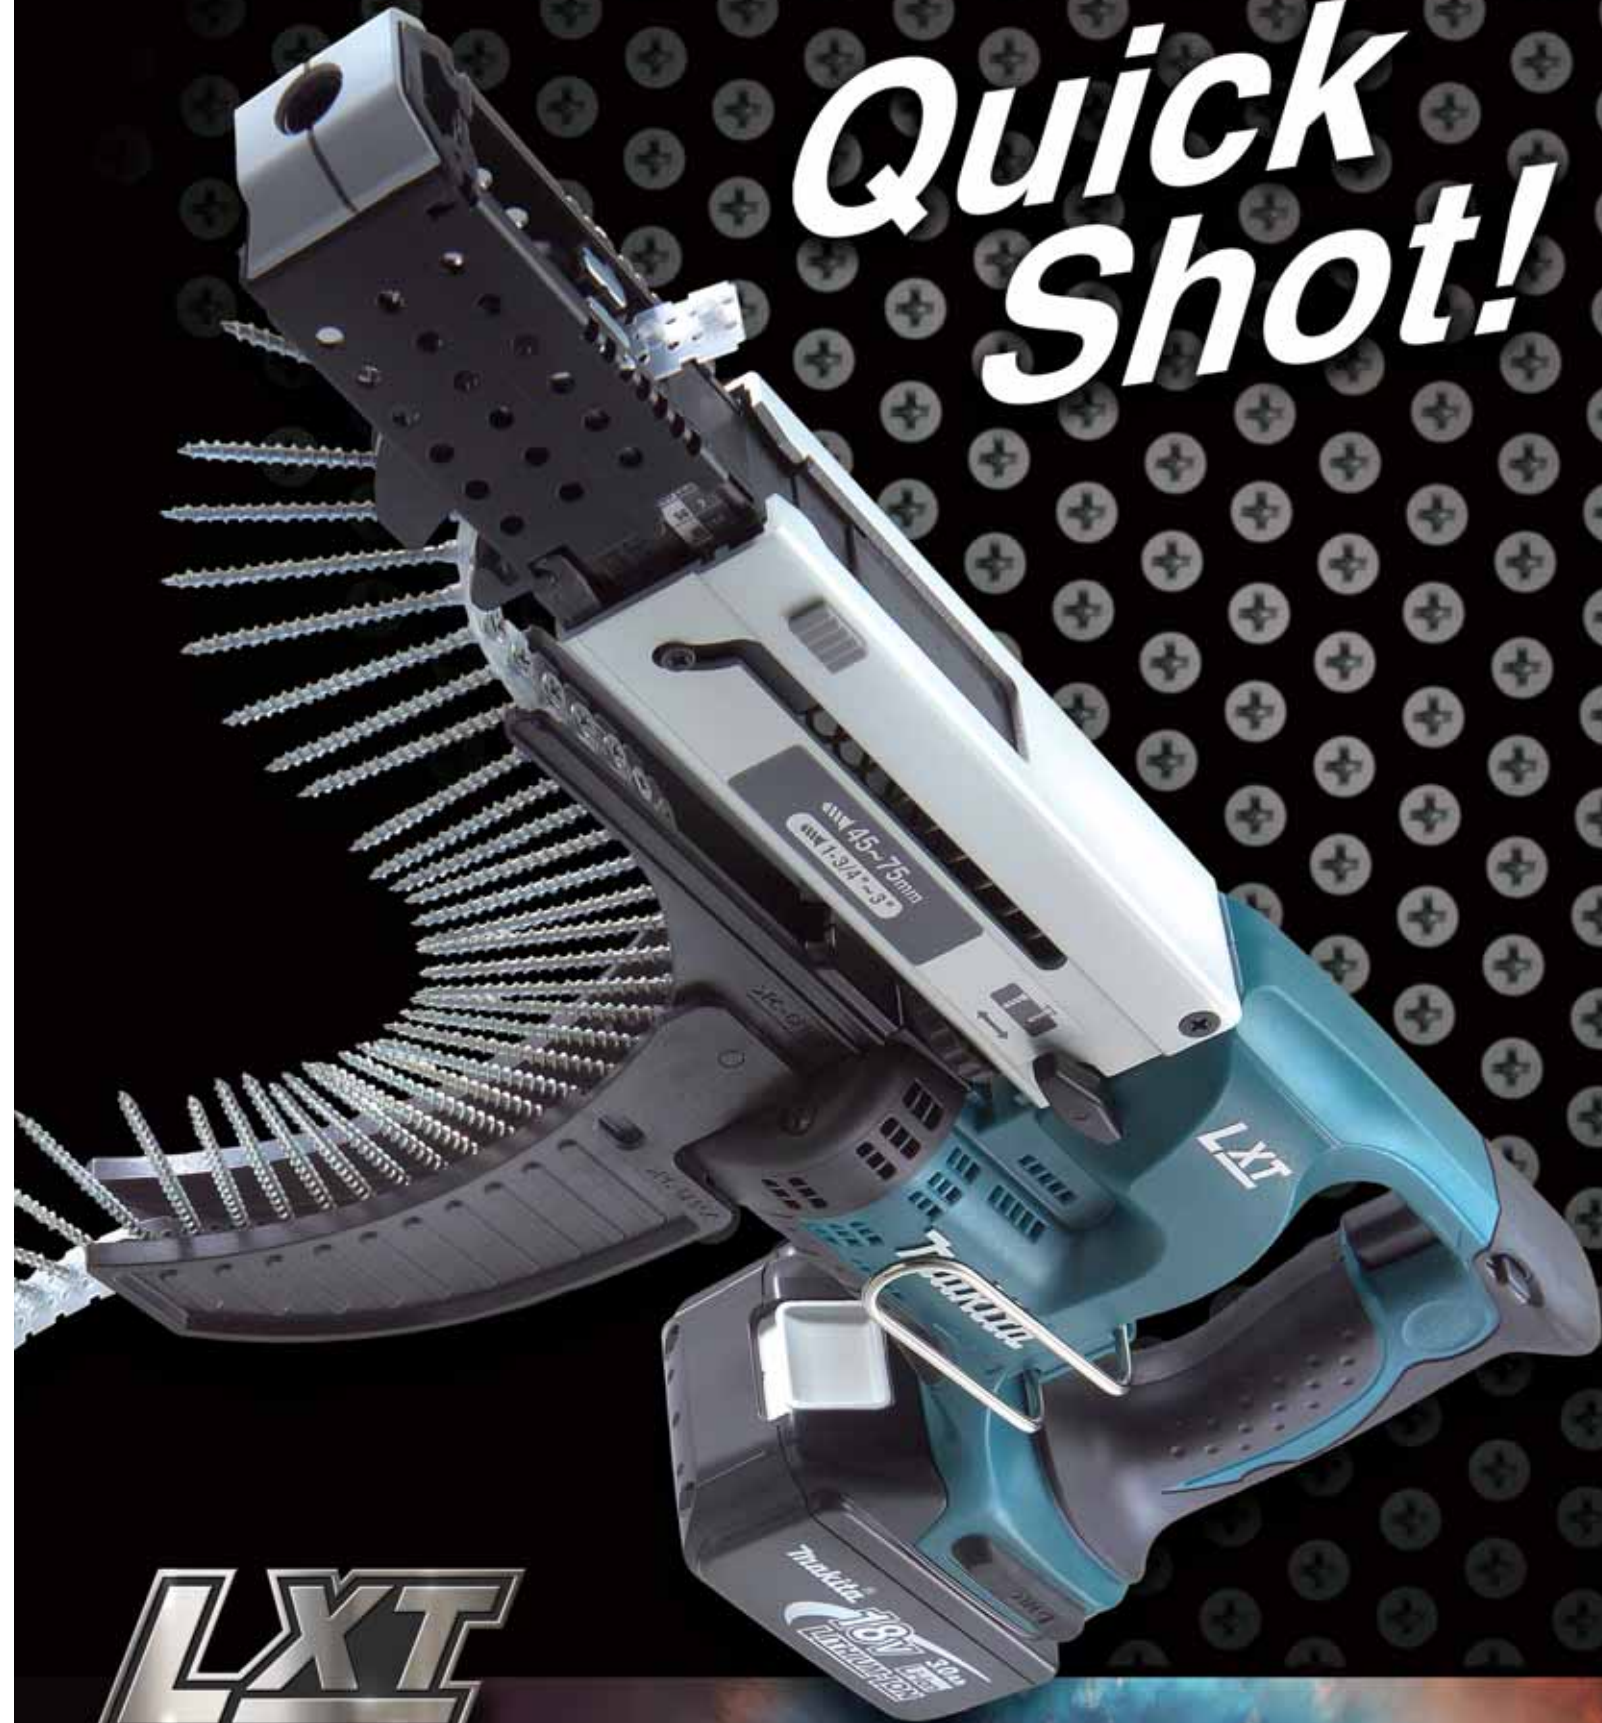

Lithium-ion eXtreme Technology





More Reliable Casing Attachment



Quick Shooting

with Makita's New Silent Clutch

Our New Silent Clutch features extremely high durability while ensuring high operation efficiency with direct drive transmission in reverse rotation.

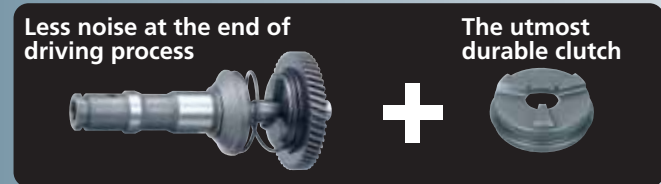

Accept screw length up to 55mm

BFR540
4,000rpm

Capacity:
4mm X 25mm to 55mm
(5/32" X 1" to 2-3/16")



Accept screw length up to 55mm

BFR550
4,000rpm

Capacity:
4mm X 25mm to 55mm
(5/32" X 1" to 2-3/16")



Accept screw length up to 75mm

BFR750
4,000rpm

Capacity:
4mm X **45mm to 75mm**
(5/32" X 1-3/4" to 2-15/16")

